


LED Flood Light


DLFL-009A



配光曲线图 Light Pattern

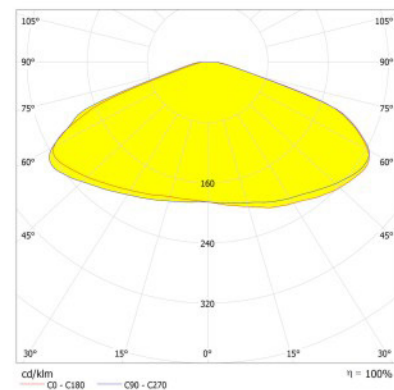

TYPE5 Light Pattern

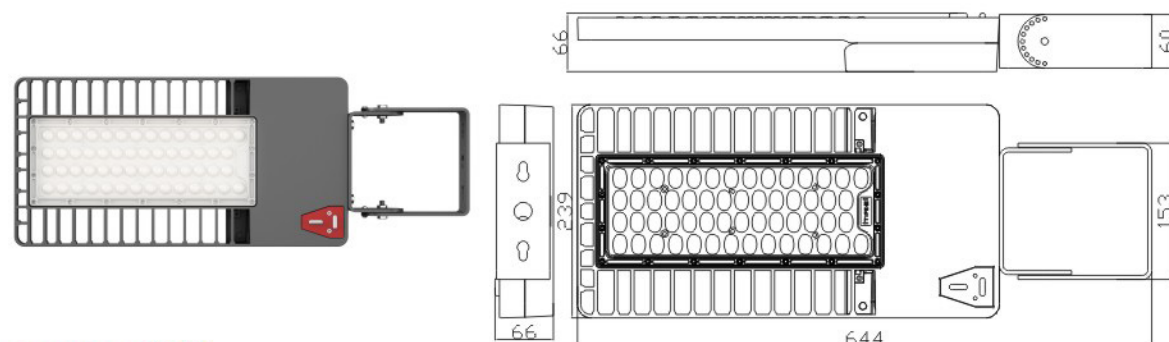

Description 简述

- Fixture body (灯体): Die-cast aluminium.
Optical system (光学部件): Type 4 PC lens.
Mounting bracket (安装支架): Diecasting Trunnion with powder coating paint.
Finishing (表面喷塑): Surface anti-ageing electrostatic spray processing, super resistance to corrosion.

基本性能 Characteristics:


类别 Performance	DLFL-009A
防护等级 Safety type	IP65
外壳防腐性能 Housing's anti-Corrosion property	Class II
防触电保护等级 Electric on shock-proof rating	Class I
工作环境 Working environment	-35°~+45°C
功率及光源 Available power	90-120W LED
额定电压 Rated voltage	AC 110V-277V
产品尺寸 Product size	644x239x66mm

LED Flood Light


DLFL-009B



配光曲线图 Light Pattern

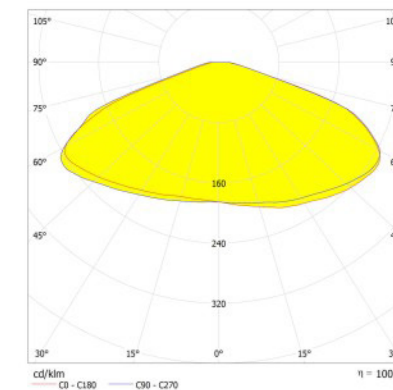

TYPE5 Light Pattern

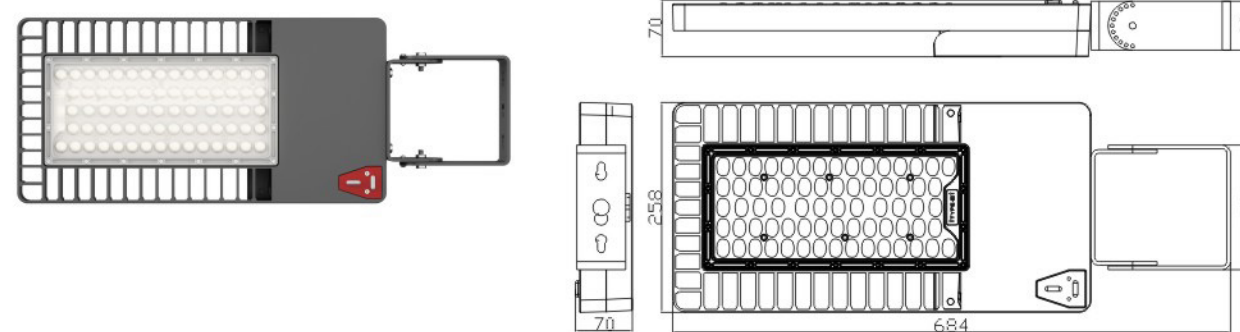

Description 简述

- Fixture body (灯体): Die-cast aluminium.
Optical system (光学部件): Type 4 PC lens.
Mounting bracket (安装支架): Diecasting Trunnion with powder coating paint.
Finishing (表面喷塑): Surface anti-ageing electrostatic spray processing, super resistance to corrosion.

基本性能 Characteristics:

类别 Performance	DLFL-009B
防护等级 Safety type	IP65
外壳防腐性能 Housing's anti-Corrosion property	Class II
防触电保护等级 Electric on shock-proof rating	Class I
工作环境 Working environment	-35°~+45°C
功率及光源 Available power	150-180W LED
额定电压 Rated voltage	AC 110V-277V
产品尺寸 Product size	684x258x70mm