




DLST-012 »

室外
Outdoor



宽电压
Wide Voltage
110-277

Light Pattern

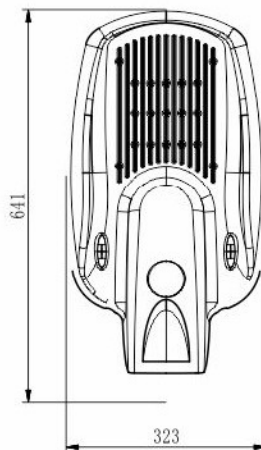

Description 简述

Die-cast aluminium.

Fixture body (灯体):

Anodized PP plastic reflector and special light distribution lens, with tempered glass lens frame.

Optical system (光学部件):

Surface anti-ageing electrostatic spray processing, super resistance to corrosion.

Finishing (表面喷塑):

6-8, 8-10m.

Height (安装高度):

Top or side fitting ϕ 60mm, angle can be adjustable.

Fixing (安装方式):

基本性能 Characteristics:

类别 Performance	DLST-012
防护等级 Safety type	IP65
外壳防腐性能 Housing's anti-corrosion property	Class II
防触电保护等级 Electric shock-proof rating	Class I
工作环境 Working environment	-35°C +45°C
功率及光源 Available power	80-120W LED
额定电压 Rated voltage	AC 110V-277V
产品尺寸 Product size	641*323*116mm