



LED Street Light

DLST-011A

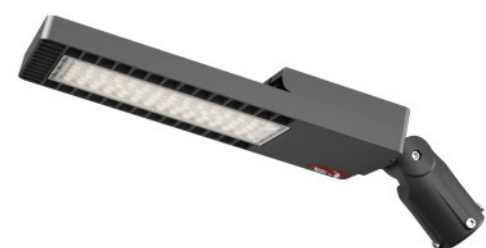


配光曲线图
Light Pattern





TYPE3-M Light Pattern

室外
Outdoor
宽电压
Wide Voltage
110-277



TYPE4-S Light Pattern

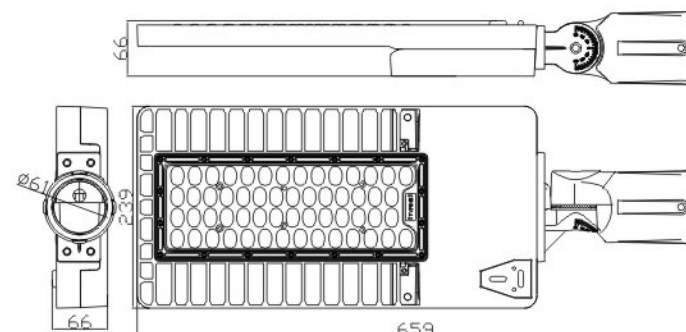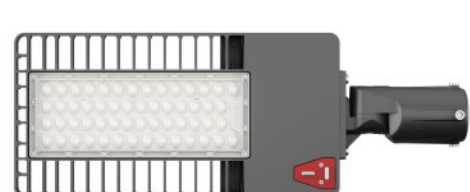

Description 简述

- Fixture body (灯体): Die-cast aluminium.
Optical system (反射罩): Type 3 or Type 4 lens for option
Finishing (表面喷塑): Surface anti-ageing electrostatic spray processing, super resistance to corrosion.
Height (安装高度): 3-6m.
Fixing (安装方式): Top or side fitting Ø60mm, angle can be adjustable

基本性能 Characteristics:


类别 Performance	DLST-011A
防护等级 Safety type	IP65
外壳防腐性能 Housing's anti-Corrosion property	Class II
防触电保护等级 Electric on shock-proof rating	Class I
工作环境 Working environment	-35°~+45°C
功率及光源 Available power	90-120W LED
额定电压 Rated voltage	AC 110V-277V
产品尺寸 Product size	659x239x86mm

LED Street Light

DLST-011B




配光曲线图
Light Pattern




TYPE3-M Light Pattern

室外
Outdoor
宽电压
Wide Voltage
110-277



TYPE4-S Light Pattern

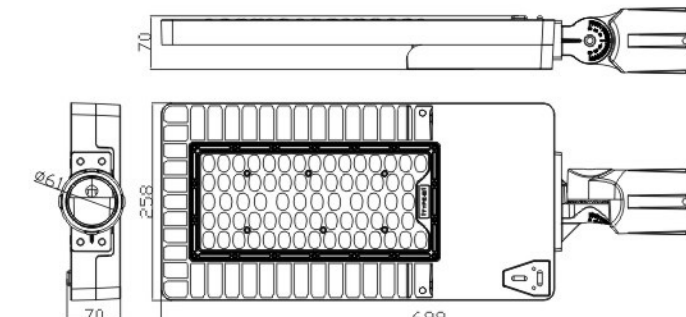

Description 简述

- Fixture body (灯体): Die-cast aluminium.
Optical system (反射罩): Type 3 or Type 4 lens for option
Finishing (表面喷塑): Surface anti-ageing electrostatic spray processing, super resistance to corrosion.
Height (安装高度): 6-9m.
Fixing (安装方式): Top or side fitting Ø60mm, angle can be adjustable

基本性能 Characteristics:

类别 Performance	DLST-011B
防护等级 Safety type	IP65
外壳防腐性能 Housing's anti-Corrosion property	Class II
防触电保护等级 Electric on shock-proof rating	Class I
工作环境 Working environment	-35°~+45°C
功率及光源 Available power	150-180W LED
额定电压 Rated voltage	AC 110V-277V
产品尺寸 Product size	699x258x86mm