


## DLGL-002

室外  
Outdoor


宽电压  
Wide Voltage  
110-277




### Light pattern

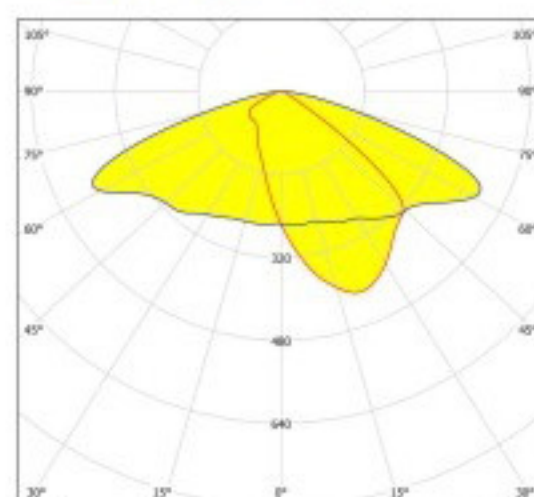



T1-S 142° x 60°

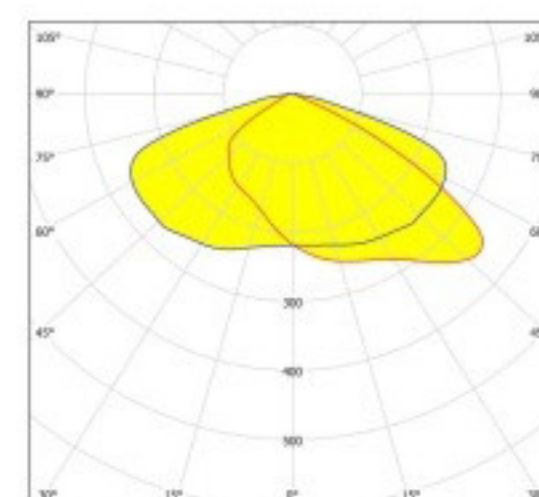

T3-S 145° x 75°

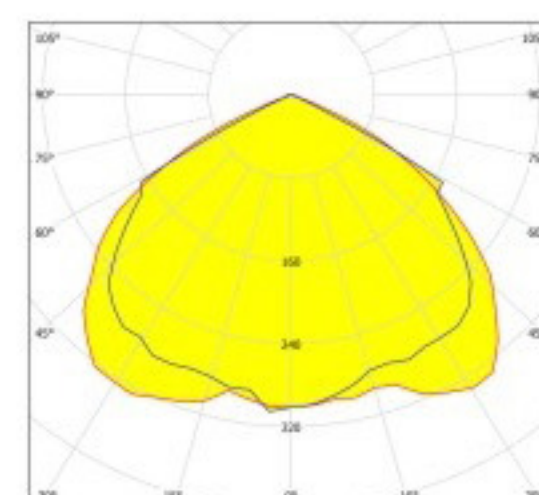

T5-VS 120° x 120°

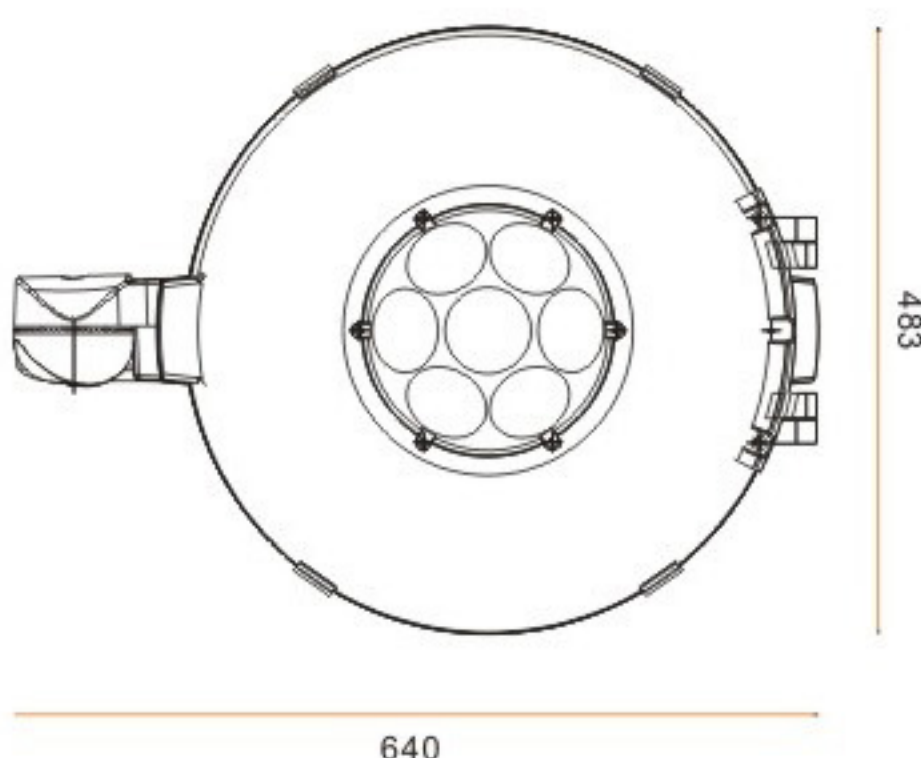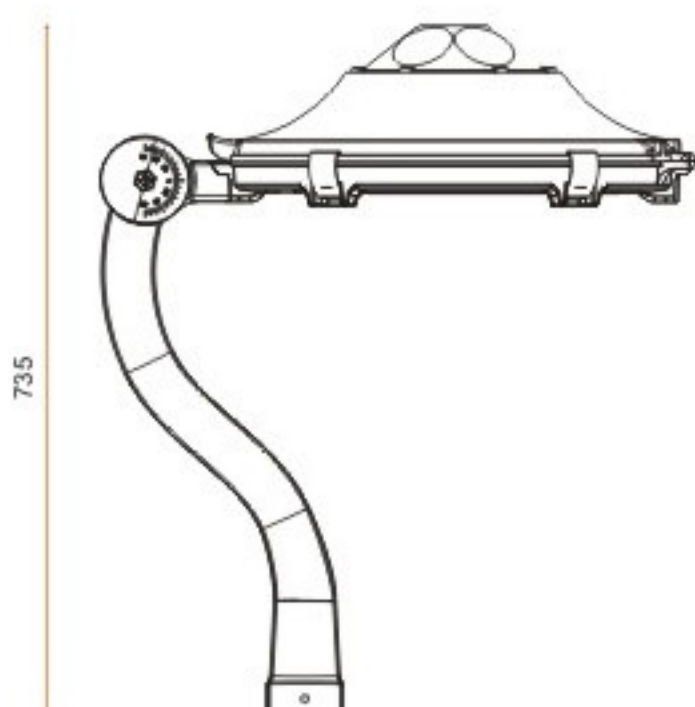

### Description 简述

- Fixture body (灯体): Die-cast aluminium housing with easy opening clip. Photocell can be as option.
- Optical system (光学部件): Type I, III, IV optic lens for option
- Finishing (表面喷塑): Surface anti-ageing electrostatic spray processing, super resistance to corrosion.
- Height (安装高度): 4-9m.
- Fixing (安装方式): Top fitting Ø60mm.

### 基本性能 Characteristics:

| 类别 Performance                          | DLGL-002      |
|-----------------------------------------|---------------|
| 防护等级 Safety type                        | Ip65          |
| 外壳防腐性能 Housing's anti-corrosio property | Class II      |
| 防触电保护等级 Electric shock-proof rating     | Class I       |
| 工作环境 Working environment                | -35°~+45°C    |
| 功率及光源 Available power                   | 30-100W LED   |
| 额定电压 Rated voltage                      | AC 110V-277V  |
| 产品尺寸 Product size                       | 640*483*735mm |