

**DLIL-001**





DLIL-001A



DLIL-001B



**Light pattern**

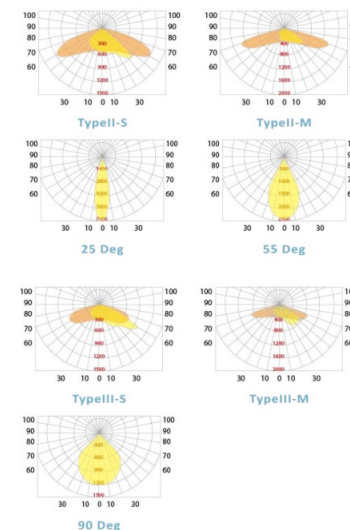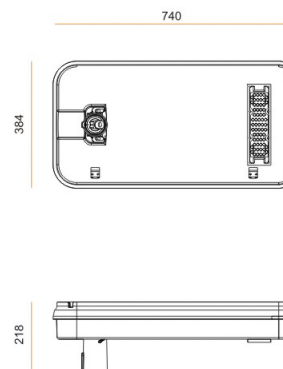

**Product Information 产品信息**

| Power (功率)                 | DLIL-001A(15W)               | DLIL-001B(30W) |
|----------------------------|------------------------------|----------------|
| Solar Pannel (太阳能板)        | 18V 30W                      | 18V 60W        |
| Lithium Battery (锂电池)      | 12V/30AH                     | 12V/60AH       |
| LED (LED 光源)               | Edison 36颗1组                 | Edison 36颗2组   |
| Lamp Luminous Flux (流明)    | 1650 ± 5% lum                | 3300 ± 5% lum  |
| Charge time (充电时间)         | < 6小时                        | < 6小时          |
| Discharge tim(放电时间)        | 全额放电情况下 ≥ 10小时, 按节能模式状况下4-5天 |                |
| Color temperature (色温)     | 5000-6000K                   | 5000-6000K     |
| Working temperature (工作温度) | -30 ~ 60℃                    | -30 ~ 60℃      |
| Moutning height (安装高度)     | 4-6m                         | 5-8m           |
| IP Rating (IP防水等级)         | IP65                         | IP65           |

**Description 简述**

|                        |                                                                                    |
|------------------------|------------------------------------------------------------------------------------|
| Fixture body (灯体):     | Die-cast aluminium.                                                                |
| Optical system (光学部件): | Special light distribution lens 36in 1                                             |
| Finishing (表面喷塑):      | Surface anti-ageing electrostatic spray processing, super resistance to corrosion. |
| Height (安装高度):         | 3-9m.                                                                              |
| Fixing (安装方式):         | Top or side fitting Ø60mm                                                          |