

DLST-001





DLST-001A



DLST-001B

Description 简述

Fixture body (灯体):	Die-cast aluminium.
Optical system (反射罩):	Anodized PP plastic reflector and special light distribution lens, with tempered glass lens frame.
Gear plate (电器板):	Galvanized steel plate.
Finishing (表面喷塑):	Surface anti-ageing electrostatic spray processing, super resistance to corrosion.
Height (安装高度):	3-6, 6-8m.
Fixing (安装方式):	Top or side fitting $\phi 48\text{mm}$ or $\phi 60\text{mm}$, angle can be adjustable.

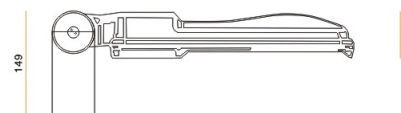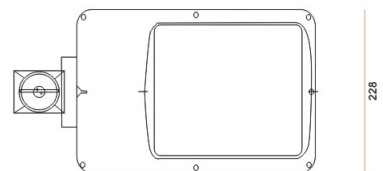


406




500

Light pattern


36 in 1 Street Lighting Module (Type II S)




36 in 1 Street Lighting Module (Type II M)



36 in 1 Street Lighting Module (Type III S)



36 in 1 Street Lighting Module (Type III M)



基本性能 Characteristics:

类别 Performance	DLST-001A	DLST-001B
防护等级 Safety type	IP65	IP65
外壳防腐性能 Housing's anti-corrosion property	Class II	Class II
防触电保护等级 Electric shock-proof rating	Class I	Class I
工作环境 Working environment	-35°~+45°	-35°~+45°
功率及光源 Available power	10-40WLED	15-60WLED
额定电压 Rated voltage	AC 110V-277V	AC 110V-277V
产品尺寸 Product size	500*228*58mm	500*228*58mm