


DLST-002




Description 简述

- Fixture body (灯体): Die-cast aluminium.
- Optical system (反射罩): Anodized PP plastic reflector and special light distribution lens, with tempered glass lens frame.
- Gear plate (电器板): Galvanized steel plate.
- Finishing (表面喷塑): Surface anti-ageing electrostatic spray processing, super resistance to corrosion.
- Height (安装高度): 6-8, 8-10, 10-12m.
- Fixing (安装方式): Top or side fitting $\phi 60\text{mm}$, angle can be adjustable.

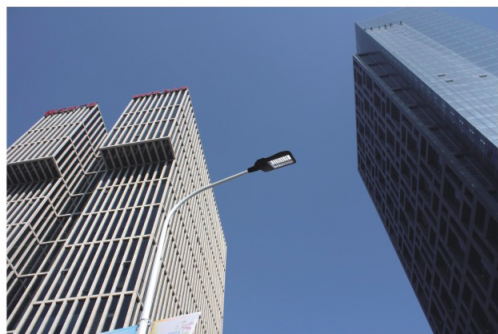


Light pattern


36 in 1 Street Lighting Module (Type II S)





36 in 1 Street Lighting Module (Type II M)



36 in 1 Street Lighting Module (Type III S)



36 in 1 Street Lighting Module (Type III M)

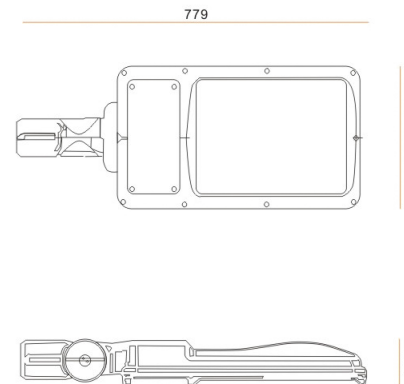

基本性能 Characteristics:

类别 Performance	DLST-002
防护等级 Safety type	IP65
外壳防腐性能 Housing's anti-corrosio property	Class II
防触电保护等级 Electric shock-proof rating	Class I
工作环境 Working environment	-35°~+45°C
功率及光源 Available power	60-200WLED
额定电压 Rated voltage	AC 110V-277V
产品尺寸 Product size	779*320*103mm