


DLST-006

室外
Outdoor




宽电压
Wide Voltage

110-277




Light pattern


36 in 1 Street Lighting Module (Type II S)





36 in 1 Street Lighting Module (Type II M)



36 in 1 Street Lighting Module (Type II S)



36 in 1 Street Lighting Module (Type II M)

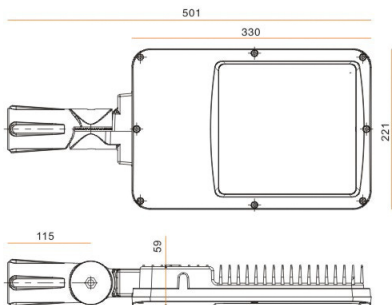

Description 简述

- Fixture body (灯体): Die-cast aluminium.
Optical system (反射罩): Anodized PP plastic reflector and special light distribution lens, with tempered glass lens frame.
Gear plate (电器板): Galvanized steel plate.
Finishing (表面喷塑): Surface anti-ageing electrostatic spray processing, super resistance to corrosion.
Height (安装高度): 3-6, 6-8m.
Fixing (安装方式): Top or side fitting $\phi 48\text{mm}$ or $\phi 60\text{mm}$, angle can be adjustable.

基本性能 Characteristics:

类别 Performance	DLST-001-A
防护等级 Safety type	IP65
外壳防腐性能 Housing's anti-corrosion property	Class II
防触电保护等级 Electric shock-proof rating	Class I
工作环境 Working environment	-35° ~ +45°C
功率及光源 Available power	10-60WLED
额定电压 Rated voltage	AC 110V-277V
产品尺寸 Product size	501*221*59mm