






DLST-007

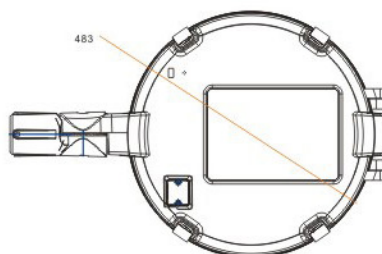

宽电压
Wide Voltage
110-277

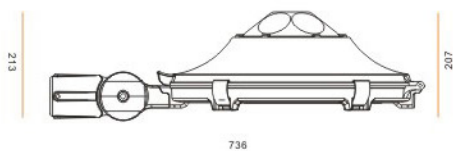

Light pattern



Description 简述

- Fixture body (灯体): Die-cast aluminium housing with easy opening clip. Photocell can be as option.
- Optical system (透镜): Type I, III, IV optic lens for option
- Gear plate (电器板): Galvanized steel plate.
- Finishing (表面喷塑): Surface anti-ageing electrostatic spray processing, super resistance to corrosion.
- Height (安装高度): 6-8m.
- Fixing (安装方式): Top or side fitting $\phi 60\text{mm}$, angle can be adjustable.

基本性能 Characteristics:

类别 Performance	DLST-007
防护等级 Safety type	Ip65
外壳防腐性能 Housing's anti-corrosio property	Class II
防触电保护等级 Electric shock-proof rating	Class I
工作环境 Working environment	-35°~+45°C
功率及光源 Available power	30-80W LED
额定电压 Reted voltage	AC 110V-277V
产品尺寸 Product size	736*483*207mm